

# XT-250

WASTE OIL HEATER

**LANAIR**  
WASTE OIL-FIRED  
HEATERS & BOILERS



Heats up to  
**8,500** sq. ft.



Up to  
**250,000** BTU




Now burns  
**100%** synthetic oil  
along with other used fluids (see back)

Factor in unstable fuel prices and escalating disposal costs and you'll see why purchasing a Lanair XT Series Heater is indeed *"The Right Choice at the Right Time!"*

The XT-250 Waste Oil Heater now burns 100% used synthetic oil and comes standard with an easy access hinged chamber door for easy clean out. It also features a large clean-out side-access panel to the collector box. Some of the new improvements made to the XT models are: easy to remove burner, a noncontinuous spark transformer, an hour meter, and a prime switch. All of these features make it easy for those who compare...buy Lanair!

# XT-250

## WASTE OIL HEATER

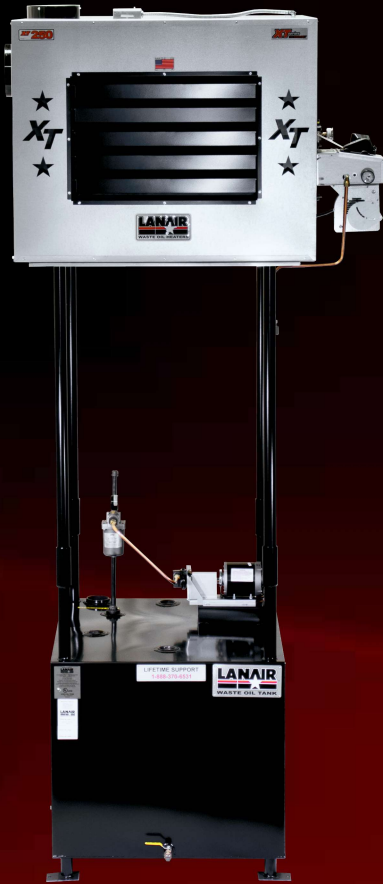


### HOW MUCH IS YOUR USED OIL WORTH?

Use our savings calculator on [lanair.com](http://lanair.com) to find out how much green you will save while protecting the environment.


**SELECT YOUR CURRENT HEATING SOURCE.**




**NATURAL GAS**



**ELECTRIC**



**PROPANE**



**#2 FUEL OIL**

Facility produces  gallons of waste oil each year:

---

By the end of your first year you could save:

**\$2,944**

---

Cost per gallon to dispose of waste oil \$

Amount you can put back in your pocket

**\$2,000**

---

Number of years you would like to see savings for:

---

Over the course of  you could save:

**\$49,440**

## PRODUCT SPECIFICATIONS

Heat Range (BTUH)*	Up to 250,000
Fuel Input (GPH)	1.8
Fuel Type†	Used crankcase oil up to 50 wt (conventional or synthetic), used automatic transmission fluid, #1 and #2 fuel oil (diesel)
Heating Area (sq. ft.)**	Up to 8,500
Power Supply (AC)***	120 V-60Hz 20 Amps
Cabinet Dimensions (L x W x H)	47" x 46" x 36"
Hanging Weight (lbs.)	670
Axial Fan (CFM)	4,600
Chimney Pipe****	8" Class A
Compressed Air*****	2 CFM – 15-18 PSI
Combustion Chamber	10 Gauge CRS
Ductable Option	No
Chimney Location	Top and side

\* BTUH value varies with fuel type.

\*\* The suggested heating area is based on building with minimal heat loss due to open door, construction, materials, windows, insulation, etc.

\*\*\* With optional compressor 30 amp breaker with 10 gauge wire is required.

\*\*\*\* Chimney package sold separately.

\*\*\*\*\* Customer supplied. Air source must be capable of producing 2.0 CFM @ 30 PSI to secondary air filter regulator.

† Stay away from gear lubes. They do not burn and will cause additional maintenance for your waste oil heater.

Hazardous waste is illegal to burn in a waste oil heater.

The EPA of the USA does not allow the burning of brake fluid, and it is illegal to burn in a waste oil heater.

There is no UL safety standard for the burning of used cooking oil (vegetable oil) at this time. It should not be burned.

Note: International customers should check their local regulations, as "what you can legally burn" may change.

Lifetime Tech Support (via phone)

Lanair App

1-Year/10-Year Limited Warranty (parts/chamber)

UL and ULC Listed

